



Scopus® doi

Journal of Vibration Engineering

ISSN:1004-4523

Registered



SCOPUS



GOOGLE SCHOLAR



DIGITAL OBJECT
IDENTIFIER (DOI)



IMPACT FACTOR 6.1



Our Website
www.jove.science

Utilization of Waste Heat From Thermo-Electric Generators

Javed Hashmi¹ Er. Anurag Singh²

Dr. C.K. Kaithwas³

¹Student

²Assistant Professor

³Assistant Professor

^{1,2,3}Department of Mechanical Engineering

^{1,2,3}Institute of Engineering & Technology, Dr. Rammanohar Lohia
Avadh University, Ayodhya-224001

Abstract

A Thermo-electric generator is a solid state device that converts heat flux into electrical energy by using the principle of Seebeck effect. This device is also known as Seebeck generator, they act like heat engines with no moving mechanism and compact. TEGs are used to recover exhaust waste in IC Engines. The addition of this device to the engine exhaust system leads to lower the back pressure of the engine and increase the overall efficiency of the engine. The integration of TEGs are coupled with the muffler of the engine without altering the functionality of the muffler to recover the waste heat of the engine exhaust system. The addition of thermoelectric modules (TEMs) to the muffler to generate electricity using the exhaust energy available in the hot exhaust gas.

Pharseology

T=Temperature

α =Seebeck coefficient

V=Voltage

ρ
=Resistivity of the thermoelectric material

K=thermal conductivity of the thermoelectric material

$\dot{Y}$ =Thermoelectric figure of merit

η =Conversion efficiency

P_{max} = Maximum power of

TEG OCV=Open circuit voltage

R_{int} =Internal resistance of TEM

Introduction

By 2050, the world energy consumption is expected to increase by 45%. Approx. 33.3% of the world energy consumption belongs to transportation sector, in which 75% energy is consumed by the road transportation sector, according to the international energy magazine. Since there is extreme research is going on towards renewable energy resources but the petroleum-based energy sources are dominating in road transportation sector because these energy resources are not reliable, efficient and cost effective. In IC engine nearly 65% of the total energy is wasted as a heat exhaust. Some improvements are held to improve their energy efficiency by in-cylinder techniques but engines have become to its saturation level. So, Bringing a waste heat recovery system. Thermo-electric generators (TEGs), Thermo-acoustic generators (TAGs) are promising to improve the efficiency of the IC engines which will also result in lowering the fuel consumption and greenhouse gas emission. Thermo-electric generators (TEGs) have been focused as a solid-state technology in which the direct conversion of low-grade energy (Thermal energy) into high grade energy (electrical energy). In context TEGs have been many advantages in the

recovery methods because it has no moving parts, cancellation of noise and vibrations, low maintenance and eco-friendly.

(1,12)

The electricity produced by the TEG can be directly used to assist the electrical system of the vehicle and hence the size of the alternator of the vehicle can be easily reduced.


Thermo-Electric Principle

The thermoelectric principle is a way to convert heat energy into electrical energy or the reverse of this. The term is generally constrained to their irreversible conversion of electricity into heat. A thermoelectric generator (TEG) consists of several number of thermoelectric modules (TEMs). A TEM consists of several number of serially connected thermoelectric elements and these elements are made of p and n semiconductor materials. The thermoelectric effect is observed in a circuit of two dissimilar conductors. Increasing the number of thermoelectric elements in TEM results in total increment of power generation by a TEM. According to Joule's law, "It says that a current carrying conductor produces heat is directly proportional to the product of the resistance of the conductor and the square of the current passing through it". Around 1800s, Seebeck brought to

dissimilar metals where the junction at which the metals touch are at different temperatures.⁽²⁾ He observed that a voltage developed between the junctions are proportion to the difference in heat. The current developed is due to the difference in temperature at the junction known as Seebeck effect. The current density (J) generated by a TEG can be calculated by the following relation –

$$J = \alpha(-\Delta V + E_{\text{emf}})$$

Since Seebeck effect alone is not sufficient to describe the thermo-electric principle, the Peltier effect comes into the boundary of consideration. The Peltier effect helps in describing the heat loss or absorption or dissipation at the connection of conducting materials. According to the direction of flow of current, heat is either dissipated or absorbed by the material at junction. The conversion efficiency of a TEM module from heat to electricity is a function of temperature difference across the hot and cold side & the properties of the thermo-electric material (like thermal conductivity, electrical resistivity, Seebeck coefficient etc.).⁽³⁾

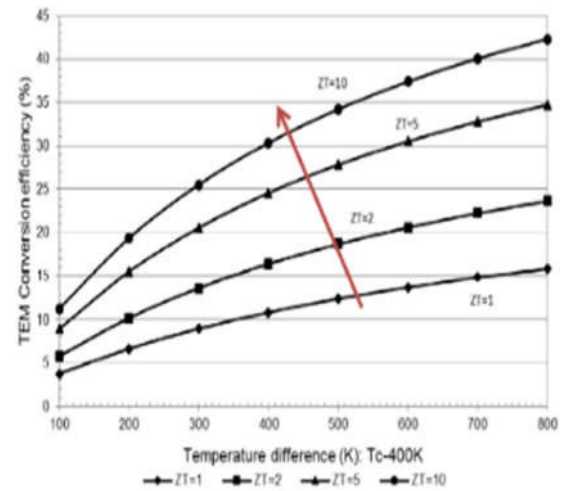

Material of TEM–

Since thermoelectric generators are not yet popular due to its low conversion

efficiency. In

this modern generation, commercially available TEMs are made of Bismuth Telluride (Bi_2Te_3) material,

whose

conversion efficiency is less than

10% with a thermoelectric figure of merit (ZT) less than 0.5 which implies that the

overall

conversion efficiency of TEG is constrained due to its performance boundary from the availability of materials. The thermo-electric

figure

of merit is a function of temperature and some materialistic property

.


$$ZT = a \frac{\rho}{K} T^2$$

—

Since conversion efficiency of thermoelectric material is a function of ZT . Therefore to improve the ZT of TE material scientists and engineers are making lot of efforts. The conversion efficiency is given as (4,13)

$$\eta = \left(\frac{\sqrt{1 + ZT_{avg}} - 1}{\sqrt{1 + ZT_{avg}} + \frac{T_c}{T_h}} \right) \frac{(T_h - T_c)}{T_h}$$

Modelling of a Thermo-electric generator

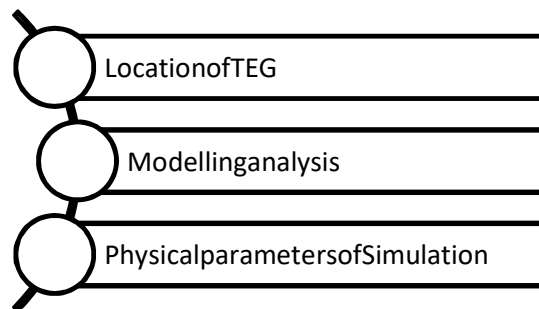


1) Location of TEG:-

TEGs are functionally designed to retrieve the waste heat from the exhaust gas of the IC Engines (mainly your focus is bounded to the IC Engines). In an IC engine there are several components embedded to form an exhaust system like, CAT (catalytic converter), DP F (diesel particulate filter), EGR (exhaust gas recirculation) system, SCR (selective catalytic reduction) system,

and resonator to

manage the tail pipe emission and the noise as well as adverse vibration. Since exhaust gas that are produced by the IC engine needs to be cleaned during the exhaust stroke through the exhaust system, and to complete this stroke the engine needs to utilise the energy of the burnt gas in the cylinder. (5,6,7) As the exhaust gas comes through the above procedure after treatment devices and noise attenuator, a back pressure drop increases with the speed and the load of the IC engine which leads to increase the exhaust gas pumping power and reduces performance of the engine drastically.

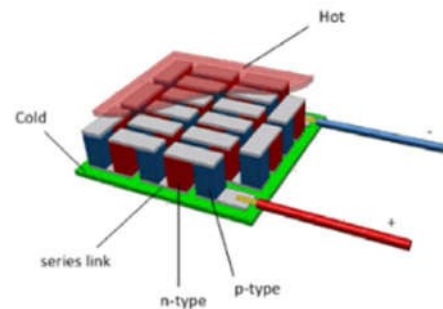

2) Modelling Analysis:-

An engine dynamometer test is carried out on a modified four-stroke V6 engine and to investigate the impact of back pressure development it is shown that the 11.3 kPa back pressure increment results in

the result of peak torque by 4.9% and the peak power by 6% while at a 16 kPa backpressure increment results in a decrement of peak power and peak torque by 8.3% approximately. The major fraction of overall

pressure drop are due to muffler and resonator (55%-65%).^(6,8,9) According to above data it is highlighted that addition of any other heat exchanger device (or waste heat recovery device) to the exhaust system with further lower the engine performance due to increment in the engine backpressure. The temperature of the exhaust gas at

the secondary muffler of a


SI engine around 573 K where as the exhaust gas of a CI engine is around 423 K. therefore the addition of TEMs to the muffler and develop

the muffler as a thermoelectric generation will avoid the additional back pressure increment and will give surety that the summation of TEG-muffler waste heat recovery device to the exhaust system will not deteriorate the performance of the engine and lead to have high possibility to recover the heat from the hot exhaust gas as.^(10,11)

Therefore this analysis results to embedded the TEMs to rear muffler and make the rear muff

fler as TEG.

TEMs, half of the total are mounted on

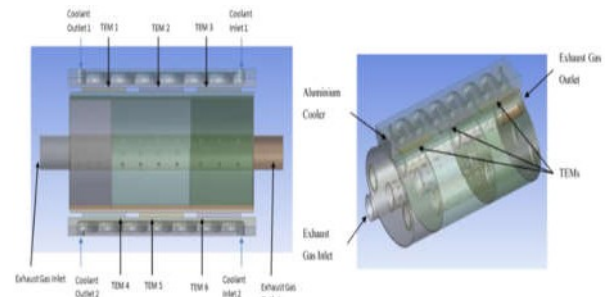


3) Physical Parameters of Simulation:-

Parameter	$T_{ex.gas}$ (K)	$\dot{m}_{ex.gas}$ (kg/s)	$\dot{m}_{coolant}$ (kg/s)	$T_{coolant}$ (K)
Base Case	800	0.2	0.22	355

As shown in the above figure, a standard passenger car muffler made of steel or steel alloy was used to mount the TEMs to modify the muffler as the TEG. ANSYS Fluent software is used for modelling and simulation purpose. In the case study, 8 thermoelectric modules (10 cm x 10 cm x 5 mm) are mounted on the body of the muffler. Out of 8

either side. Hot exhaust gas is passing through the muffler and raise the temperature of the muffler body. An aluminium (al) alloy based plate is fixed to the muffler body and then TEMs are embedded on the aluminium alloy based. A heat sink setup is provided on the other side of the TEMs to lower the temperature and this is the when a coolant fluid body is mounted on the other side of the TEMs.

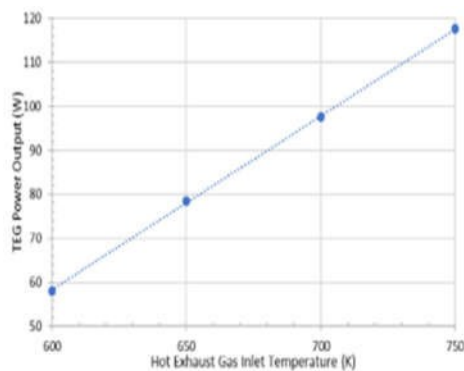

Maximum power generated by a TEM can be calculated as the ratio of OCV to the 4 times of the internal resistance and it was defined as an UDF (user defined function, which was developed and defined in the ANSYS fluent program to predict the electrical power output) during the simulation.


$$P_{\max} = \frac{OCV}{4R_{\text{int}}}$$

Since simulation was performed

reference

to the above

parameter and thereafter, exhaust gas inlet temperature was varied from 700 K–850 K, exhaust gas inlet mass flow rate was varied from 0.1 kg/sec–0.25 kg/sec, coolant inlet mass flow rate was varied from 0.1 kg/sec–0.25 kg/sec and finally coolant inlet temperature was varied from 340 K–365 K.

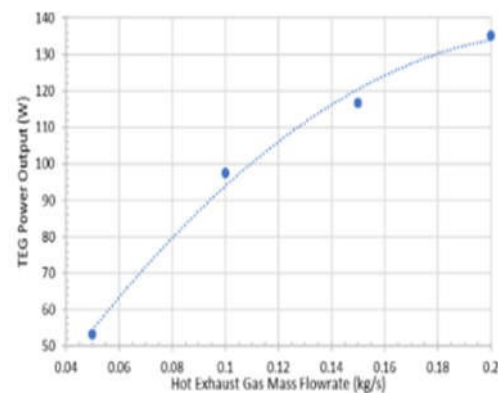


These TEMs are designed to generate 22 watt maximum, when the hot and cold side temperature is maintained at 280 K. So, expecting the maximum power of TEG would be around 200 Watt (approx.). Considering the discontinuous total power generation.

Results and Analysis

The availability of the exhaust gas ranging from 35 kW–55 kW as the temperature increases from 700 K to 850 K. the power output is also a function of

temperature of exhaust flow which are related as directly proportional.

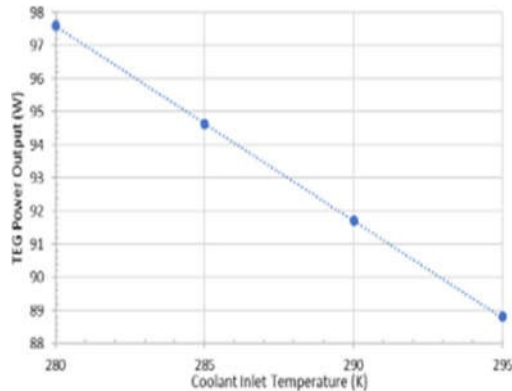


The availability for exhaust gas flow was estimated for various exhaust gas flow rate and found to be ranging between 25kW to 75kW as the exhaust gas mass flow rate ranging from 0.10 kg/sec to 0.025 kg/sec respectively. Also the power generation by the TEG is directly proportion to the exhaust gas mass flow rate.

The simulation results also focus that the TEG power output is inversely proportion to the coolant temperature, also the TEG power output is not increase as the increasing in the coolant mass flow rate at optimum coolant mass flow rate the TEG power output is maximum but after the optimum the value of mass flow rate.

Conclusion

From the results it is noticed that generation by TEG which

is coupled to the exhaust muffler increases when increasing the exhaust gas temperature and the exhaust mass flow rate. TEG power generation is lower when there is increment in the coolant temperature. The TEG power output can be optimized when selecting the coolant mass flow rate when it is at its optimum level.

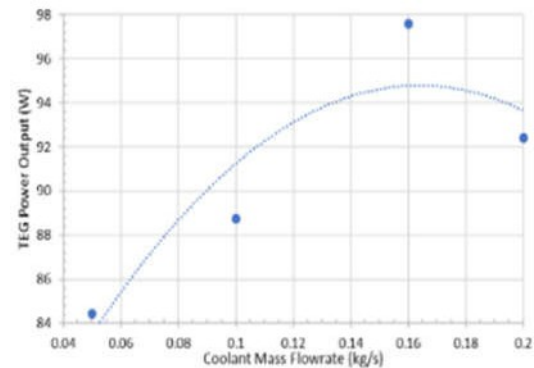

When the TEG is attached to the exhaust muffler, waste heat can be recovered without abdicating additional back pressure in engine exhaust system it is because the pressure drop created in

the muffler is directly proportion to the exhaust mass flow rate which will result in the increment of brake specific fuel consumption (BSFC) and the overall efficiency of an IC engine can be unaltered. So that exhaust heat recovery can be impressively enhanced

by contriving the TEMs from higher figure of merit (ZT) thermoelectric materials.

As a subsequent work, the proposed thermoelectric generator can be integrated with a muffler is expected to embedded and tested to validate the simulation results.

and book macrotona no (first ed.), CRC press, United Kingdom (2005)

(5)

References

- 1) C O Katsanos, D T Hountalas, V T Lamaris, Recovering Energy from the Diesel Engine Exhaust Using Mechanical and Electrical Turbo Compounding, SAE Technical Paper, 2007-01-1563, Detroit, MI, 2007. (1)
- 2) S Wagh, S Sen, G Iyer, S. Shukla, Development of Exhaust Silencer for Improved Sound Quality & Optimum Back Pressure. SAE technical papers, 2010-01-0388, Detroit, MI, 2010. (2)
- 3) W R Menchen, W E Osmeyer, M McAlonan, Thermoelectric conversion to recover heavy duty diesel exhaust energy. In: Proc. of the annual automotive technology development contractors meeting-SAE, 1991 (3)
- 4) Goldsmid H.J.A new upper limit to the thermoelectric
- 5) W Wardane MA Exhaust system energy management of internal combustion engines (Ph.D. Thesis) published by Loughborough University, U.K. (2012) (6)
- 6) K. Ikoma, Thermoelectric module & generator for gasoline engine vehicle. In: Proc. of 17th international conference on thermoelectric - Nagoya, Japan, 1998, p. 445-9. (7)
- 7) Diego AA, Timothy A.S., Ryan K.J. Theoretical analysis of waste heat recovery from an internal combustion engine in a hybrid automobile (2006) (8)
- 8) Richard Stobart, A Wijewardane, C. Allen, The potential for thermoelectric devices in passenger vehicle. SAE Technical Paper, 2010-01-0833, Detroit, 2010. (9)

- 4) Goldsmid H.J.A new upper limit to the thermoelectric
- Rowe D.M. (Ed.), Thermoelectric sh

9) Rowe
D.M. Thermoelectric handbook
from macro to nano
(first ed.), CRC Press, UK (2005)
(10)

10) Dresselhaus M.S., Chen
G., Tang M.Y., Yang R.G., Lee H.
, Wang D.Z., Ren Z.F.,
Fleurbaey J.P., New directions
for low-
dimensional thermoelectric materials
Adv Mater, 19(8) (2007),
pp. 1043-1053 (11)

11) Davis K. Exhaust
backpressure
Internet: <http://www.veryuseful.com/mustang/tech/engine/exhaustScavenging.pdf>,
[Date
Accessed: May 28, 2017] (12)

12) M. Masoudi, Pressure Drop of Segmented Diesel Particulate Filters. SAE technical papers, 2005-01-0971, Detroit, 2005. (13)

